



BREWERS SIMPLIFIED

Phone: 888-302-8980

Email: info@brewtekbrewers.com

www.brewtekbrewers.com


Technical Bulletin ES-1

Energy Saver Valve Replacement & Float Modification

VALVE REPLACEMENT




STAGE 1




1. After removing the back panel, remove the 2 screws holding the valve.

STAGE 2

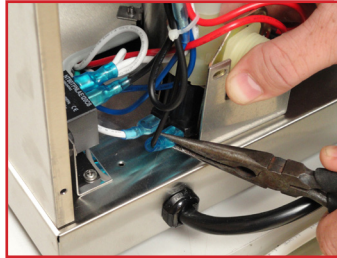

2. Remove terminals from the valve.

STAGE 3

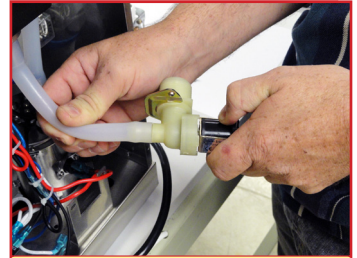


3. Pull out the valve and remove the inlet tube.

STAGE 4



4. Place the clip over the lip of the new valve with the lip of the clip facing inside.


STAGE 5

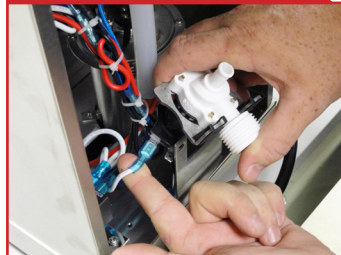

5. Place the valve back into the brewer and connect the terminals.

- White on BACK terminal
- Black on FRONT terminal

STAGE 6

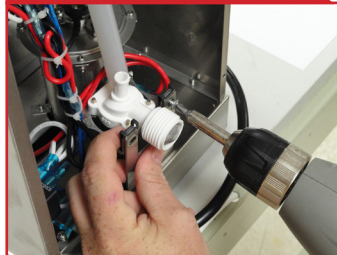

6. Screw the valve back into position.

STAGE 7



7. Connect inlet tube and secure it with a zip tie.


FLOAT MODIFICATION

STAGE 1



1. Make sure fill tube is against the back of the tank (as shown)

STAGE 2

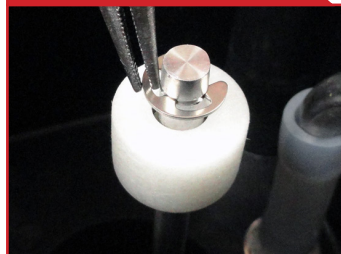

2. Remove clip float from float rod.

STAGE 3



3. Slide a piece of silicon tubing (5/16" wide) over the float rod.

STAGE 4



4. Place float back on the float rod and attach the clip.